TECHNICAL BULLETIN



Revised Underscuttle – Revised Mounting Method – Installation Instructions

DATE **7/95**

76-108

ISSUE:

Replacement underscuttle panels have only 3 "fir tree" fasteners and do not fit directly in place of the previous panel with 5 "fir tree" fasteners.

ACTION:

To install the revised replacement part in place of the original design, proceed as follows:

1. After removing screws, use dash liner tool # JD 188 to remove the underscuttle from the vehicle.

MODEL Sedan Range 1990 - 1992 MY

- 2. Remove the reinforcement panel.
- 3. Remove and discard the two captive nuts indicated in Illustration 1.

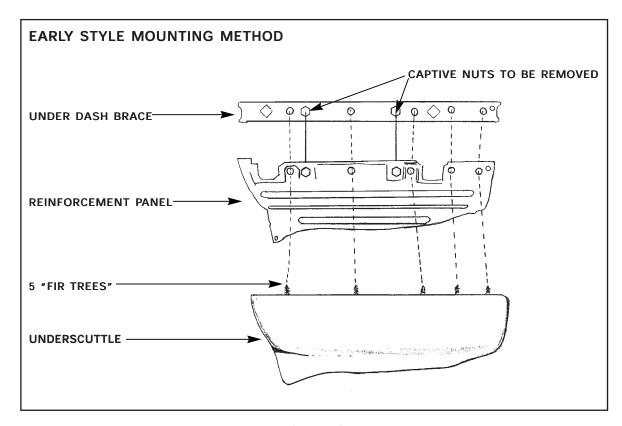


ILLUSTRATION 1

Bulletin Number 76-108 JAGUAR Date of issue 7/95 Page 1 of 2




ILLUSTRATION 2

- 4. Insert the two new female fir tree retainers (AGU 2522/J) in place of the two captive nuts on the brace as indicated in Illustration 2. (Replace the third female fir tree retainer, if necessary)
- 5. Secure the reinforcement panel onto under-dash brace using the remaining screws at the lower left and upper right, Illustration 2.
- 6. Secure the new underscuttle panel (BEC 23962/*) to the vehicle.

PARTS INFORMATION:

DESCRIPTIONPART NUMBERUnderscuttleBEC 23962/*Fir tree fastenerKTP 100002Stud retainer (female)AGU 2522/J

